


LADDER下手

LADDER上手

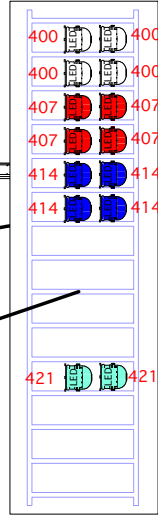

Fixture Library		
<b>Quad Par (7ch)</b> 伊東洋行 : itoyoko-LED Quad Par ( 7DMX ) ( [d----] Mode )		
<b>Color Source For( 6ch)</b> ETC : ETC -ColorSource Linear1 Deep Blue Direct (6DMX) ( [dir] - Mode )		
<b>LH-LED ( 8ch)</b> PHILIPS : SL e STRIP10 RGBW ( 8 DMX ) ( [1pixel]-[16bit] Mode ) ( Line(1) =Dimmer Ch-461~468 )		
<b>2L Mini (1ch)</b> CH-1 Dimmer	<b>6L Mini (1ch)</b> CH-1 Dimmer	<b>Cobla (1ch)</b> CH-1 Dimmer

フロア用 移動器材 アドレス		LH-LED (Dim) (SL eSTRIP 10)		客席 LED (Dim) (天井当て)	
351	358	365	372	379	473
473	479	485	491	501	461 (R)
505 (Speed)	506 (正逆)	511 (Fog)	512 (Int.Fan)	502	462 (W)
				503	463 (G)
				504	464 (G)
					465 (B)
					466 (W)
					467 (W)
					468 (W)
					500 (B)



※ トラスのS/Fx16台は、アイリス付。持込レンズへの交換は不可

**ALL LED!**

赤字 Line ① } 設定済み  
青字 Line ② } アドレス変更、要注意  
持込器材用 [ Line ③  
Line ④

- CL固定 (天井裏) 当替え不可
- Quad PAR (LED)
- Source Four (LED)
- COBLA (作業灯用) (LED)

2022/05/20 更新

# ヒューリックホール東京・照明 DMXアドレス図 (配布用) S-= 1/50 (A3)

Lighting BIG1 co.,ltd.